falmec

TAB **EAN code 8034122352107**

Version	Wall - 80 cm - Black - 800 m3/h
Design	Pio & Tito Toso
Collection	Design

Photograph is for information purposes only. May not correspond to the selected version

TECHNICAL FEATURES

Materials/Finishes	Black opening frontal
Materials/Finishes	Chrome edge
Features	LED lighting on body and door Opening frontal
Control	Electronic control
Function	Extracting/Filtering
Chimney	Possible to duct wall mounted from rear Optional chimney
Lighting	LED 4x1,2 W - 3200 K
Filters	Top filter, removable and washable Charcoal filter
Dimensions	80 cm
Minimum Electric hob distance	52 cm
Minimum Gas hob distance	55 cm
Notes	RAL 9005 / Matt black The RAL codes have to be considered indicative since production process and materials may alter the colors.

CONNECTION AND CONSUMPTION FUNCTIONS

Maximum consumption	280 W
Voltage/Frequency	220-240V 50-60Hz
Plug	Shuko

MOTOR

Motor	800 m^3/h
Maximum capacity	750 m^3/h I.E.C.61591
Maximum sound level	58 dB (A)re1pW I.E.C. 60704-2-13
Energy class	A

WEIGHTS AND VOLUMES

Gross weight	25 kg
Net weight	21 kg
Volume	0.28 m3
Packaging dimensions	L 995 x H 482 x P 595 mm

falmec

TAB **EAN code 8034122352107**





Water, like air, is a fluid transparent and vital element. Falmec transfers its experience from one element to the other, presenting a range of solutions for the use of water in the kitchen.

Optional accessories

Code	*Description*
KCTCN.001#N	Chimney - Black
KACL.1059	Conveyer for air outlet (Ø150)

falmec

TAB **EAN code 8034122352107**

ENGINE SPECIFICATIONS

Motor speed	1	2	3	4
Noise dB(A) re1pW I.E.C. 60704-2-13	46	53	58	66
Capacity	295	390	500	750
Maximum pressure (Pa)	390	440	490	510
Motor power (W)	130	150	178	224
Air outlet	150	150	150	150

FLOW RATE / PRESSURE

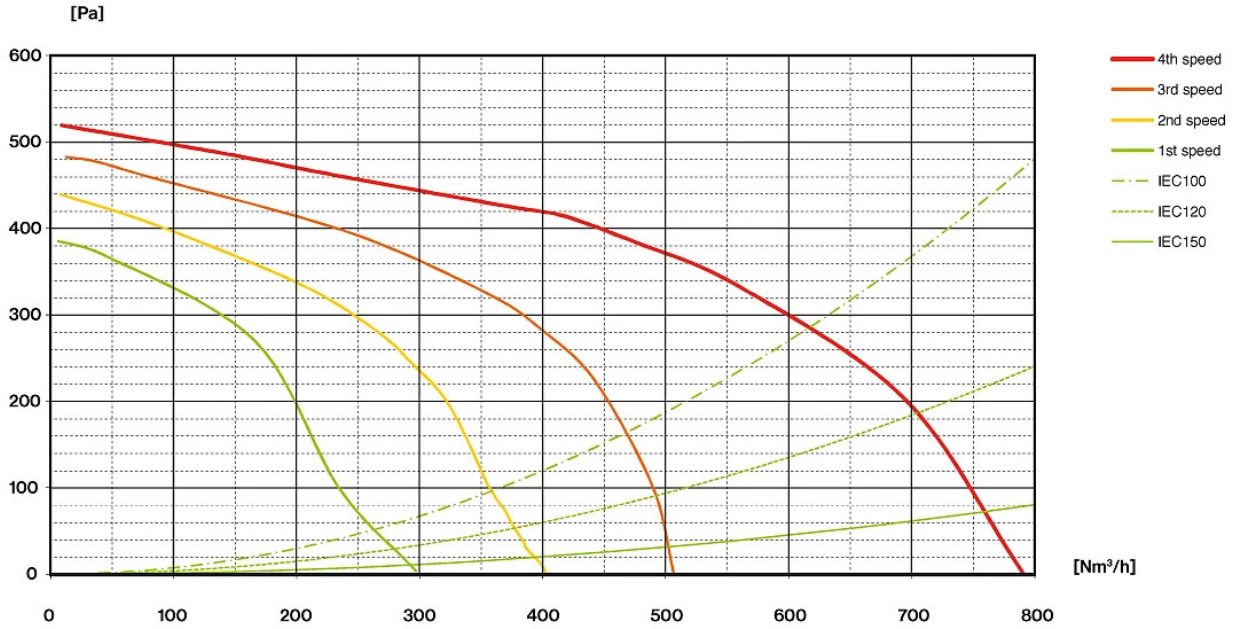

falmec

TAB **EAN code 8034122352107**

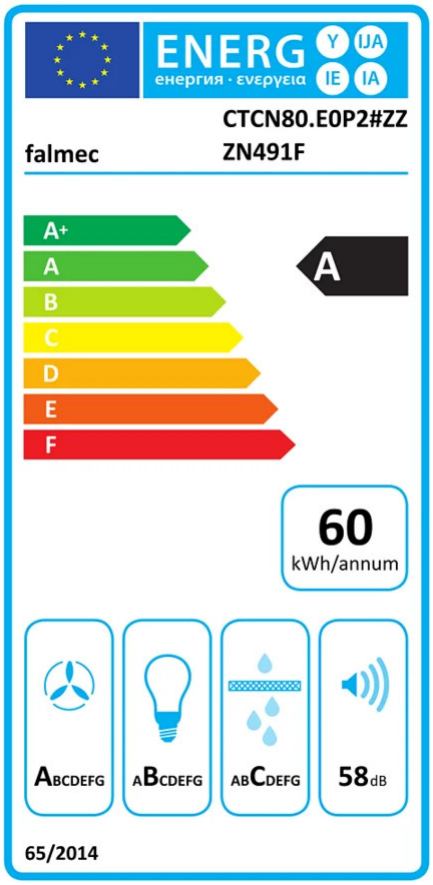

PF		
S	Pio & Tito Toso	
M	Wall - 80 cm - Black - 800 m3/h	
AEC	60.20	kWh/a
EEC	A	
FDE	29.80	
FDEC	A	
LE	24.90	
LEC	B	
GFE	82	
GFEC	C	
Qmin	295	m^3 /h
Qmax	500	m^3 /h
Qboost	750	m^3 /h
SPEmin	46	dBa
SPEmax	58	dBa
SPEboost	66	dBa
PO	0	W
PS	0.48	W
PI		
F	0.90	
EEI	54.60	
Qbep	432	m^3 /h
Pbep	407	Pa
Qboost	750	m^3 /h
Wbep	164	W
WL	8.60	W
Emiddle	214	lux
Lwa-SPEmax	58	dBa

PF_Scheda prodotto conforme a 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m^3/h) at min speed in normal use / Qmax_Air flow (in m^3/h) at max speed in normal use / Qboost_Air flow (in m^3/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps).
PI_Additional information according to 66/2014 Calculation methods: EN 61591:2020 F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.

rev. 22/05/2026